

# SLM-600/700/900

Recycling (SLM-600R/700R/900R)  
Ventilating (SLM-600V/700V/900V)



SLM-900



SLM-600

†Available only in Stainless Steel

## SPECIFICATIONS (BASED ON 230V)

### DIMENSIONS (WxDxHxHH) (mm)

SLM-600 600 X 460 X 120 X 50  
SLM-700 700 X 460 X 120 X 50  
SLM-900 900 X 460 X 120 X 50

### AIRFLOW (LOW/MID/HI) (m<sup>3</sup>/h)

SLM-600, 700, 900 (R) 100 / 140 / 190  
(V) 205 / 285 / 495

### SOUND LEVEL (LOW/MID/HI) dB(A)

SLM-600, 700, 900 (R) 41 / 51 / 59  
(V) 38 / 48 / 59

### OIL FUMES CAPTURE

SLM-600, 700, 900 (R) 85% (V) 80%


### POWER CONSUMPTION WITH LAMP (LOW/MID/HI) (watt)

SLM-600, 700, 900 (R) 120 / 130 / 145  
(V) 125 / 140 / 150

### WEIGHT (kg)

SLM-600 9  
SLM-700 9.5  
SLM-900 10.5

## INSTALLATION DETAILS

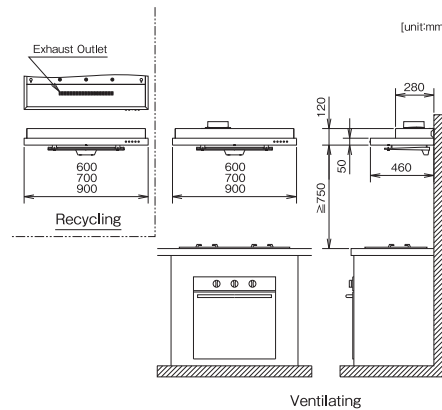

## ACCESSORIES

### FILTER



- Aluminum Slot Filter

### OPTIONAL PARTS UPGRADE



- Aqua Slit Filter
- Optional - customers can upgrade their set to one that comes with the Aqua Slit Filter instead of the Aluminum Slot Filter. And customers need to note that there is a price difference.

## FEATURES

- Aluminum Slot Filter eliminates oily build-ups, and is washable and easy to clean.
- Technologically Advanced Removable Rectifier Panel.
- Turbo Fan with integrated German motor.
- Oil Catch Tray.
- Fire-retardant Body.
- Utility Light.
- Push Button-Switch Panel.

All specifications are based on stringent in-house test results conducted in Fuji Industrial Co., Ltd, Japan