

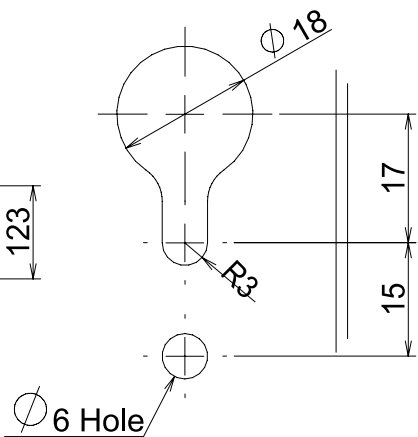
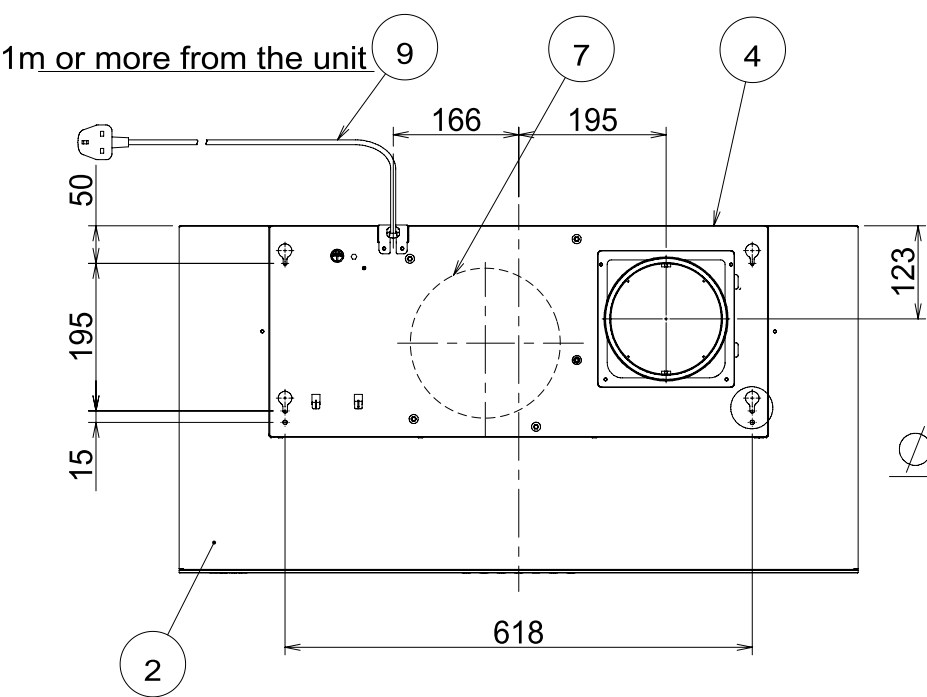
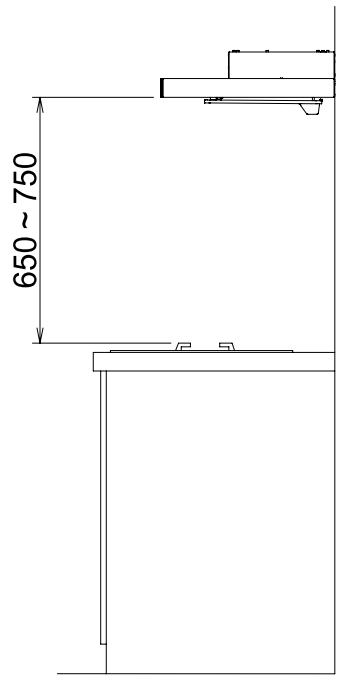
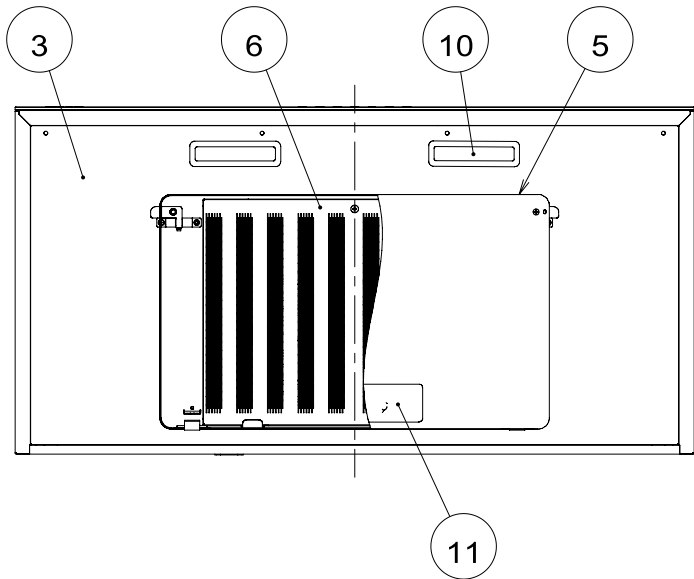
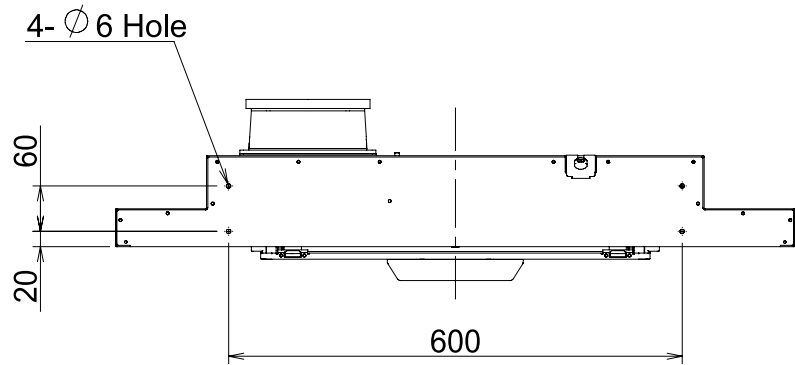


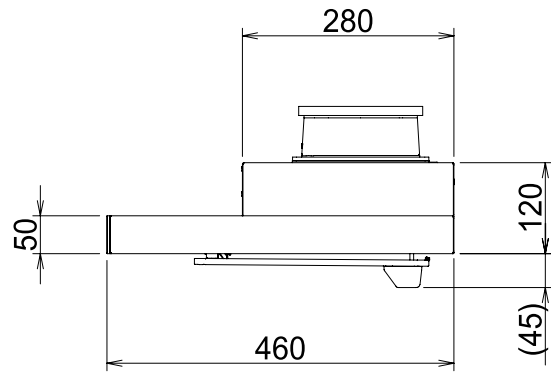

- Accessories
- Flat washer 6pcs
 - ST5×40 Wood screw 6pcs
 - Plastic expansion pipe 6pcs
 - ST4.2×16 Flat head screw . . . 4pcs

Major Parts				
No	Parts	Material	Finish	Color
1	Hood front plate	Toughened Glass		
2	Hood frame	Stainless steel No,4/Galvanized steel		
3	Oil panel	Stainless steel	No,4	
4	Body	Galvanized steel		
5	Rectifier baffle panel	Stainless steel No,4/Galvanized steel		
6	Filter	Galvanized steel(Aqua Slit Filter,1 layer)		
7	Fan motor	4 Pole capacitor motor,class F		
8	Switch	Static electrical switch with gesture control (On/Off,Low,Med,Hi,Timer,,Light)		
9	Power supply cord	Cabtire cable		
10	Lighting	LED(Daylight white color),1.5W×2pc		
11	Oil tray	Polycarbonate		★Accessories
12	Exhaust port	Polypropylene		★Accessories

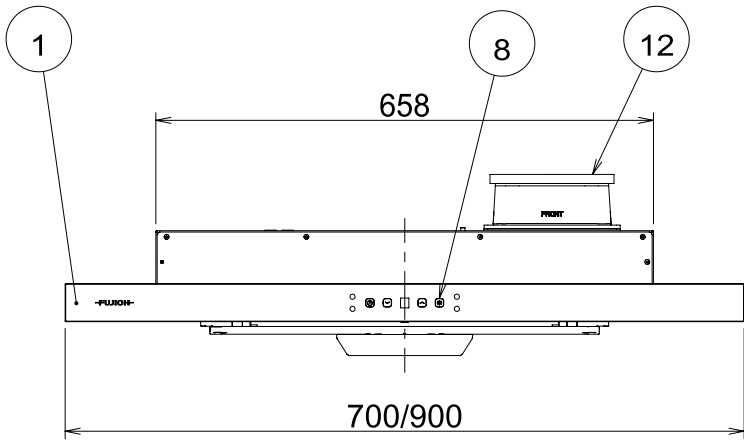

Standard Installation

Specifications										
Model	Voltage (V)	Speed	Frequency (Hz)	Power consumption (W)	Airflow(m³/ h)		Sound (db)	Weight (kg)		
					0Pa	-				
FR-MS2370V FR-MS2390V	220	Hi	50	218	400	-	57	9.4 10.3		
		Med		156	320	-	52			
		Low		120	230	-	45			
	230	Hi		233	420	-	58			
		Med		169	330	-	53			
		Low		130	250	-	46			
	240	Hi		255	435	-	59			
		Med		182	350	-	54			
		Low		140	260	-	47			
Motor class	4 Pole capacitor motor	insulation resistance	Over 10MΩ (500Vmegger)	Withstanding voltage	AC1000V for1min	Insulation class	F			
Airflow measured by JIS C9603 chamber method										

FR-MS2390VW	———	White glass /White paint	———
FR-MS2390VBK	———	Black glass /Black Paint	———
FR-MS2390VSS	———	Black glass /Stainless steel	———
FR-MS2370VW	———	White glass /White paint	———
FR-MS2370VBK	———	Black glass /Black Paint	———
FR-MS2370VSS	———	Black glass /Stainless steel	———
Model	Product code	Color	Note
Created date		01/02/2023	Product category
Updated date			Model
			FR-MS2370/90V
-FUJIOH-		Scale 1/10	Product outline drawing

Mark	Revised record	Date
△		